

(22) International Filing Date:

(30) Priority Data:

9700508.6

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:			(11) International Publication Number:	WO 98/30617
C08G 63/12, 63/668, A61L 31/00, 27/0 25/00, 15/60	0,	A1	(43) International Publication Date:	16 July 1998 (16.07.98)
(21) International Application Number: PC	г/GB98	8/000	(81) Designated States: AL, AM, AT, ABY, CA, CH, CN, CU, CZ, DE	

GB

9 January 1998 (09.01.98)

(71) Applicant (for all designated States except US): SMITH & NEPHEW PLC [GB/GB]; 2 Temple Place, Victoria

11 January 1997 (11.01.97)

Embankment, London WC2R 3BP (GB).

(72) Inventor; and (75) Inventor/Applicant (for US only): SEARLE, Richard, John [GB/GB]; 12 Fairway Drive, Upper Poppleton, York YO2 6HE (GB).

(74) Agent: SMITH & NEPHEW GROUP RESEARCH CENTRE; Group Patents & Trade Marks Dept., York Science Park, Heslington, York YO1 5DF (GB).

GH, HU, IL, IS, JP, KE, KG, KP, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: HYDROGELS

(57) Abstract

Cross-linked polyester hydrogels, suitable for use as medical implant devices or biodegradable supports for cell cultures used in for example cartilage repair, comprise residues of succinic acid and a polyol having at least three hydroxy groups.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	Fl	Finland	LT	Lithuania	SK	Slovakia
ΑT	Austria	FR	France	. LU	Luxembourg	SN	Senegal
. AU	Australia	GA	Gabon	LV.	Larvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GB	Georgia	. MD	Republic of Moldova	TG	Togo
·BB	Barbados	.GH	Ghana	MG	Madagascar	T)	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	· VN	Vict Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KG	Кутдуzstan	NO NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	. KP	Democratic People's	NZ	New Zealand		·
CM :	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan .	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Pederation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HYDROGELS

The present invention relates to hydrogels. In particular, the present invention relates to polyester hydrogels.

5

Polyesters of succinic acid are known from US Patent No.3,883,901. Such polyesters are the reaction product of a succinate ester, such as diethyl succinate, and a glycol, such as polyethylene glycol.

10

15

20

25

30

Poly (1,4-butanediol succinate) is known from D K Song, Y K Sung, Journal of Applied Polymer Science, 56, 1381, (1995).

We have now surprisingly found that polyesters produced by reacting succinic anhydride with a polyol containing three or more hydroxy groups are novel and advantageous.

Thus, according to the invention we provide a polyester comprising residues of succinic acid and a polyol containing three or more hydroxy groups.

Thus according to a further feature of the invention we provide a water swellable hydrogel comprising a polyester which polyester comprises residues of succinic acid and a polyol containing three or more hydroxy groups.

By the term a water swellable hydrogel is meant a threedimensional network of a super absorbent polymer which interacts with aqueous solutions by swelling and retains a significant proportion of water within its structure.

For the purpose of this invention a super absorbent polymer is understood to mean a polymer which is capable of having an equilibrium water content of at least 30% w/w.

35

We particularly provide a polyester as hereinbefore described with a number average molecular weight (M_n) of greater than

(4500), preferably greater than (10,000), and more preferably greater than (20,000).

The high molecular weight polyesters of the invention are also advantageous over prior art polyesters in that they exhibit cross-linking.

Thus as a further feature of the invention we provide a cross-linked polyester of succinic anhydride and a polyol, eg. a cross-linked polyester comprising residues of succinic acid and a polyol containing three or more hydroxy groups. Such cross-linked copolyesters generally act as hydrogels.

Any conventional polyols containing three or more hydroxy groups known <u>per se</u> are suitable for use in the present invention. Such polyols include, for example, polyether polyols or polyhydroxyalkanes. It should be noted that the polyols for use in the present invention should not be limited to the polyether polyols or the polyhydroxyalkanes.

20

30

35

10

Polyhydroxyalkanes of the general formula

$$C_nH_{(2n+2)}O_n$$

in which n is a number from 3 to 6,

are suitable for the preparation of the polyester of the invention and include, for example, glycerol, sorbitol, mannitol, adonite, ribite, dulcitol, erythritol and xylite. Polyols such as triols which may be mentioned include trihydroxyalkanes such as glycerol.

Examples of polyether polyols include those sold under the range of TP30 by Perstorp.

It is also possible to use a mixture of polyols which will include mixtures of polyether polyols or mixtures of polyhydroxyalkanes. Especially preferred are mixtures of polyether polyols and polyhydroxyalkanes.

The polyesters of the invention may be prepared using conventional methods known per se.

Thus according to the invention we provide a method of manufacturing a polyester as hereinbefore described which comprises mixing succinic anhydride and a polyol containing three or more hydroxy groups and drying the mixture at elevated temperature.

10

15

20

25

30

35

5

The method of manufacturing a polyester according to the invention may optionally include the use of a catalyst. Preferred catalysts are acid catalysts and especially protic acid catalysts. Particular protic acid catalysts which may be mentioned include sulphuric acid, methane sulphonic acid and p-toluene sulphonic acid.

The ratios of the succinic anhydride and the polyol in the polymerisation reaction will depend upon, inter alia, the functionality of the polyol, that is, the number of free hydroxy groups and the degree of cross-linking required in the resulting polyester. Thus if succinic anhydride has a functionality of 2, glycerol, which has two primary and one secondary hydroxy group is also considered to possess a functionality of 2 since the secondary hydroxy is less reactive than the primary hydroxy groups. Defined in terms of functionality the ratio of succinic anhydride to polyol should be from 0.7:1 to 1:1.3, preferably 1:1. For example in molar terms a polyester of succinic anhydride and a triol such as glycerol should comprise preferably 3 units of succinic anhydride to 2 units of glycerol, eg. giving a preferred functionality ratio of 1:1.

Polyesters according to the invention may be characterised using conventional techniques known <u>per se</u>, such as infra red spectroscopy, nmr, rheological measurements, glass transition measurements and water uptake.

The polyesters according to the invention are particularly advantageous in that they are biodegradable. Thus they may be

useful in preparing biodegradable implants such as medical or surgical prostheses, supports for such prostheses, supports for cell cultures such as may be used in ligament, cartilage or tendon repair. supports for cell cultures in woundcare or as woundcare agents in their own right, eg. debriding agents, pharmaceutical carriers etc. or the copolyesters of the invention may be useful in imaging during interventional procedures.

It is intended that the aforementioned uses should not be 10 limitative and are mentioned by way of example only.

15

20

25

30

35

The polyesters of the invention are also advantageous in that they are sterilisable. Any conventional form of sterilisation may be used, eg. steam sterilisation, but an especial benefit of the polyesters of the invention is that they may be sterilised without detrimental effect by x-radiation.

Thus according to a further feature of the invention we provide a polyester as hereinbefore described in sterile form, eg. wherein the sterilisation has been carried out by x-radiation.

Polyesters produced from succinic anhydride and diols are known in the prior art to be useful as bioresorbable sutures. Experimental results indicate that such polyesters, as well as the polyesters of the present invention may be especially useful in wound healing, eg. as a debriding agent.

Thus according to the invention we provide the use of a polyester comprising residues of succinic anhydride and a polyol in the manufacture of a wound healing agent, eg. a debriding agent.

According to a further feature of the invention we provide a method of wound healing which comprises applying a polyester comprising residues of succinic acid and a polyol to the wound of a patient.

We especially provide the use of a polyester according to the invention as hereinbefore described.

The invention may will be illustrated but in no way limited by way of the following examples and by reference to the Accompanying drawings. Temperatures are stated in degrees celsius.

Example 1 Preparation of Polyesters I

10 Aliquots of Polyol TP30 (from Perstorp) and succinic anhydride were mixed together in the ratios shown in Table 1in a closed jar and heated on a hotplate for a few minutes, whilst stirring. A clear solution resulted. One drop of methanesulphonic acid (MSA) was added, and stirring continued for about a minute. Each solution was poured onto the silicone side of a release paper, and placed in a petri dish in a desiccator containing succinic anhydride (3g) and a tray of dried silica gel.

The desiccator was heated in an oven at 80° for 5 to 15 mins with the tap open. It was then heated with the tap closed for a further 15 to 16 hrs at 80°. The resulting materials were heated in a vacuum oven at 70°.

TABLE I

Reaction	Stoichiometry	Succinic anhydride/mmol	TP30
Number COOH:OH*		(mmol COOH eq)	mmol OH
		·	
1	1:1.3	20 (40)	52
2	1:1.29	20 (40)	51.8
3	1:1	20 (40)	40.2
4	1:1	20 (40)	40.3

^{*}Succinic acid is considered to have a COOH stoichiometry of 2.

20

25

Example 2
Swelling in Water

Several materials resulting from Reaction 1 of Example I

(1:1.3/COOH:OH) were swollen in water. The weight change results after 1 day swelling are shown in Table II.

TABLE II

Time Under Vacuum	% Weight Gain
3h 40mins	33.3
7h 15mins	40.8

15 <u>Example 3</u>

<u>Preparation of Polyesters II</u>

Aliquots of Polyol TP30 and succinic anhydride in the ratios shown in Table III were mixed in a closed glass vessel and heated on an oil bath until a clear solution resulted. Methanesulphonic acid (MSA) was added, and stirring continued for about a minute. The solution was poured into a tray of dried silica gel. When the temperature had equilibrated to 80°, the oven valves were closed, except that one valve was left very slightly open to prevent pressure build-up in the event of thermostat failure. Vacuum was not applied. Products were removed from the oven after 16 hours.

TABLE III

		T	T	
Reaction	No. Millimoles	No. Millimoles	COOH/OH	% w/w MSA
<u>Number</u>	COOH	<u>OH</u>	Ratio	
261/1a	19.48	19.49	1	0.56
261/1b	24.11	24.13	1	0.56
261/1c	31.23	31.25	1	0.56
261/3	164.67	163.62	1.01	0.35
261/6	73.09	72.04	1.01	0.66
261/7	55.91	55.59	1.01	0.5
261/8	77.87	77.12	1.01	0.58
261/11	77.33	76.69	1.01	0.78
261/12	59.39	58.62	1.01	0.51

A second series of materials were prepared containing various levels of glycerol and TP30. The formulations are shown in Table IV.

TABLE IV

•						
Ì	Reaction	Glycerol (mmol	TP30 (mmol	Succinic	% Glycerol	соон/он
	No.	primary OH)	OH)	Anhydride	(mol primary	ratio
				(mmol COOH	OH)	
				eq)		
	261/9	8.07	69.94	78.14	10.3	1.00
	261/10	16.20	62.71	78.24	20.5	0.99
	261/13	23.73	23.93	47.71	49.8	1.00
	261/14	127.92	42.37	170.55	75.1	1.00
ļ	261/16	220.37	220.83	439.99	49.9	1.00
	261/17	252.20	249.80	499.65	50.2	1
	261/18	249.39	249.58	500.84	50.0	1
	261/19	213.31	212.82	427.52	50.1	1
1	261/20	227.48	221.04	442.45	50.7	0.99

Table V shows the degrees of conversion p(CooH) for these materials, calculated using the method shown below.

Degree of conversion was estimated from the weight loss, ie. water loss, during the reaction using Equation (1) below.

- 10 Water loss from the reaction is derived from the following sources:
 - a) water present in the polyol
 - b) water liberated in the reaction
- 15 c) water present in the anhydride
 - d) water absorbed from the atmosphere.
- c) is assumed to be negligible since the anhydride is stored under nitrogen, though any water absorbed would convert the
 anhydride to succinic acid and would therefore manifest itself as an error in b). This water would in fact be liberated during the reaction.
 d) is assumed to be negligible since the reaction is carried out in a

sealed system in the presence of a drying agent, followed by vacuum treatment.

- a) was calculated from the measured water content of thepolyols.
 - b) was calculated from the amounts of materials used in the reaction. Since each mole of anhydride gives rise to one mole of water (Figure 1), the total mass of water expected in the reaction $m_{\rm w}$ is given by

$$m_{w} = m_{a}m_{T} \times 18$$

$$\frac{1}{M_{a}m_{T}}$$

15

10

where

 m_a is the mass of the anhydride in the mixture (during the initial mixing procedure)

20 ,

m_T is the total mass of mixture initially prepared

m_T is the total mass of mixture poured onto the release paper

25 M_a is the molecular mass of succinic anhydride.

20

TABLE V

Reaction	COOH/OH Ratio	Scale/g	% Glycerol (mol primary (OH)	p(COOH)
	4.00	40.0	40.0	40.7
261/9	1.00	13.8	10.3	46.7
261/10	0.99	13.4	20.5	80
261/13	1.00	12.0	49.8	92
261/14	1.00	21.5	75.1	not calculated
261/16	1.00	60.0	49.9	68.4
261/19	1.00	59.8	50.1	68.3

Example 5

5 <u>Swelling Measurements</u>

a) 0% Glycerol

Figure 1 shows the percentage weight gain of the materials prepared without glycerol in both deionised water and phosphate buffered saline (PBS) as a function of time (batch number PC0695042, from Reaction 261/12, Table III).

b) 50% Glycerol

15 Figure 2 shows the percentage weight gain of the materials with 50% glycerol (based on mol % primary OH) in both deionised water and PBS as a function of time (batch number PC0695041, from Reaction 261/13, Table IV).

c) 75% Glycerol

Figure 3 shows the percentage weight gain of the materials with 75% glycerol (based on mol % primary OH) in both deionised water and PBS as a function of time (Reaction 261/14, Table IV).

Example 6
FTIR Spectroscopy

Figures 4 and 5 are FTIR spectrographs of two polyesters of
the invention. In each case the spectra showed bands characteristic
of polyesters, such as ester carbonyl at 1720cm⁻¹ and C=O
stretching around 1300cm⁻¹, together with ether C-O stretching from
the ethoxylated polyol at 1100cm⁻¹. Figure 4 shows the FTIR
spectra of the polyester produced from reaction 261/7 from Example
3 (Table IV) and Figure 5 shows that of the reaction product from
Reaction 261/10 of Example 3 (Table V).

12 CLAIMS

- 1. A hydrogel composition comprising a cross-linked polyester containing residues of succinic acid and at least one polyol having at least three hydrogel groups, said composition being adapted to absorb at least 30% of its weight of water.
 - 2. A composition according to claim 1 having an average molecular weight (M_n) of greater than 4500.
- 3. A composition according to claim 1 or claim 2 wherein the polyol is a polyester polyol, a polyhydroxy alkane or a mixture thereof.
- 4. A composition according to any one of the preceding claims wherein the polyester is the product of reaction between succinic anhydride and a polyol.
- 5. A composition according to claim 4 wherein the functionality ratio between succinic anhydride and said polyol is from 0.7:1 to 1:1.3.
- A polyester comprising residues derived from succinic anhydrides and at least one polyol having at least 3 hydroxyl
 groups.
 - 7. A medical device formed for a composition as claimed in any one of claims 1 to 6.

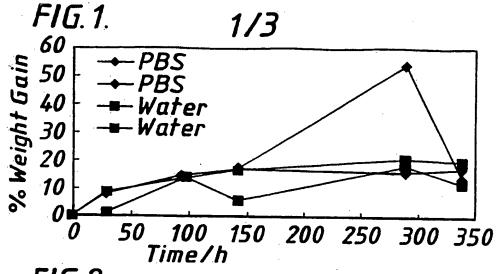


FIG.2.



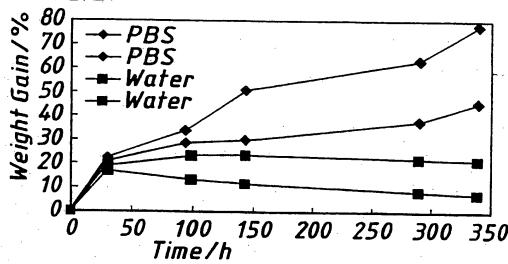


FIG. 3.




SUBSTITUTE SHEET (RULE 26)

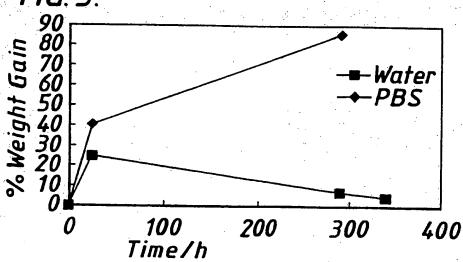

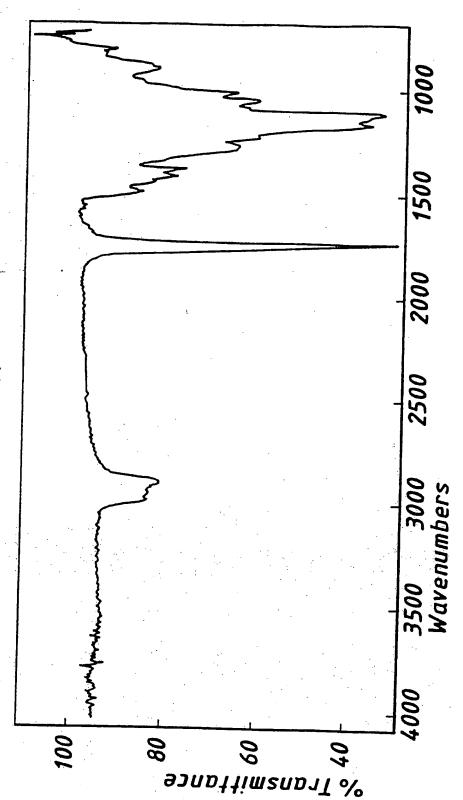

SUBSTITUTE SHEET (RULE 26)

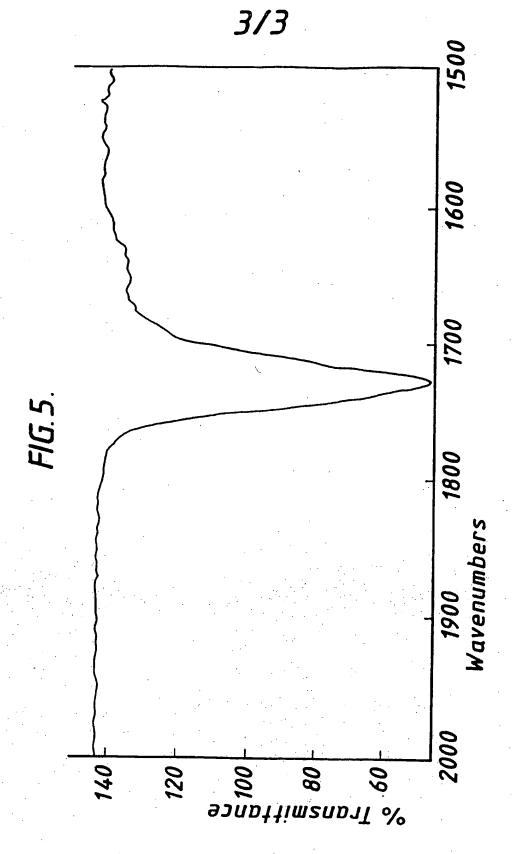

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

Inter...donal Application No PCT/GB 98/00068

	· · · ·		20, 3000
A. CLASSII IPC 6	FICATION OF SUBJECT MATTER C08G63/12 C08G63/668 A61L31, A61L15/60	/00 A61L27/00	A61L25/00
According to	International Patent Classification (IPC) or to both national classification	ication and IPC	
	SEARCHED		
Minimum do IPC 6	cumentation searched (classification system followed by classifica COSG A61L	tion symbols)	
Documentat	ion searched other than minimum documentation to the extent that	such documents are included in the f	ields searched
Electronic da	ata base consulted during the international search (name of data	base and, where practical, search terr	ns used)
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the r	elevant passages	Relevant to claim No.
Х	CHEMICAL ABSTRACTS, vol. 104, no. 24 March 1986 Columbus, Ohio, US; abstract no. 95260, HIGAKI ET AL.: "Novel, hydroph esters for hair preparations" XP002061206 see abstract & JP 60 031 802 B (NISSHIN OIL 124 July 1985	ilic polyol	1-6
		-/	
			•
Y Funt	ner documents are listed in the continuation of box C.	Patent family members ar	e listed in annex
• Sonsial co	tegorine of cited documents		
"A" docume consid "E" earlier of filing d "L" docume which citatior "O" docume other r "P" docume later th	ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another in or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or means and prior to the international filing date but the priority date claimed	"Y" document of particular relevan cannot be considered to invol document is combined with o ments, such combination being in the art. "&" document member of the same	flict with the application but ple or theory underlying the ce; the claimed invention or cannot be considered to in the document is taken alone ce; the claimed invention we an inventive step when the ne or more other such docu- ng obvious to a person skilled a patent family
	April 1998	Date of mailing of the internati	onal search report
	nailing address of the ISA	Authorized officer	
	European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Decocker, L	

INTERNATIONAL SEARCH REPORT

PCT/GB 98/00068

.(Continu	ation) DOCUMENTS CONSIDERED TO BE RELEVANT		
ategory *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	
	CHEN ET AL.: "Enzymatic and chemoenzymatic approaches to synthesis of sugar-based polymer and hydrogels" CARBOHYDRATE POLYMERS., vol. 28, no. 1, 1995, BARKING GB, pages 15-21, XP000539360 see page 17, left-hand column, line 26 - right-hand column, line 55	1-7	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)